


## Testing the switch:

Step 1: Pull the switch assembly out.

Step 2: Unplug the switch assembly from the towel warmer connector.

Step 3: Place the switch in the "ON" position.

Step 4: Set the multimeter to ohm resistance (tone setting) and test between the NO (normally open center prong) and C (common) prong. Any resistance value greater than 1 and a tone would indicate normal operation. "1", "OL", "Ω", "0" and "no tone" would indicate that the switch is faulty and needs to be replaced. Verify that the reading on the meter changes with each "ON" and "OFF" position change.

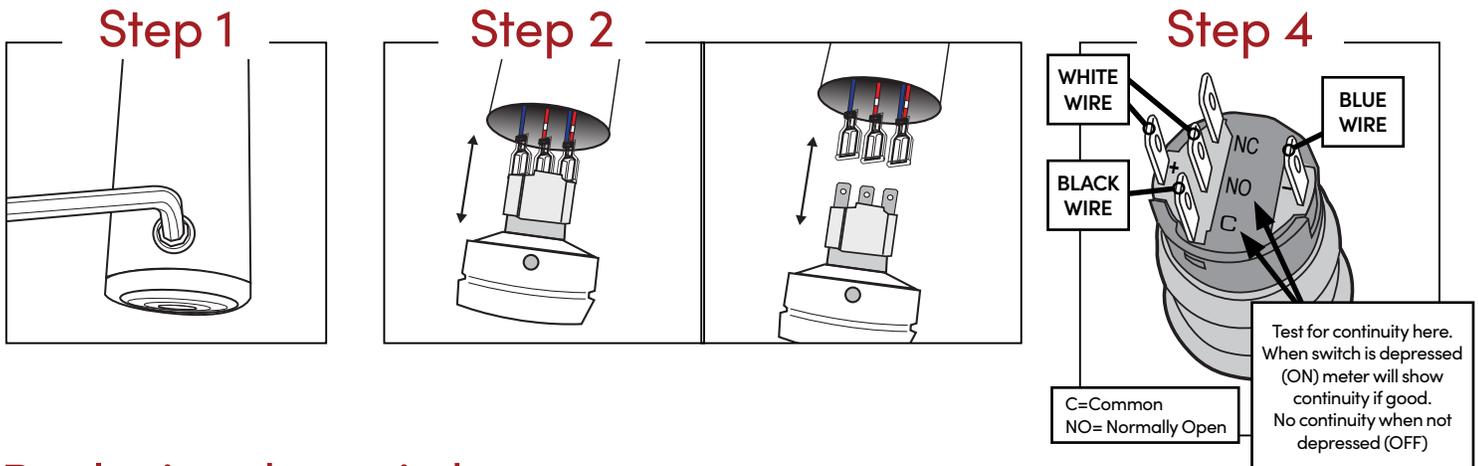


## Replacing the switch:

Step 1: Pull the switch assembly out, label and disconnect the wires.

Step 2: Connect the wires to a new switch (SK15-59020-0000) in the same manner.

Step 3: Insert the switch into the towel warmer.

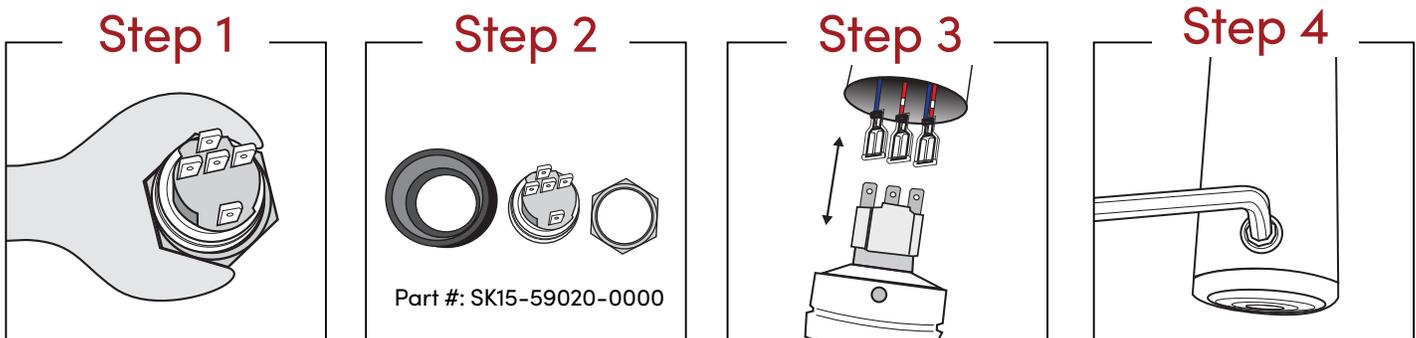

*Note: All meters are not the same, information shown on the screen of the meter being used may not match these instructions exactly.*