



Residential - Commercial - Industrial


Outdoor Embedded Slab & Stair Snow Melting (Concrete, Asphalt, Pavers) with Constant Wattage or Mats.

Cross Section of Asphalt Slab


top layer of asphalt
(2" to 3" thick)
heater cables placed at
8" on center spacing

base layer of asphalt
(binder coat 2" thick)


crushed rock aggregate
(6" to 10" thick)

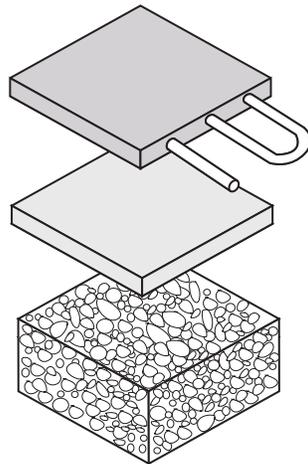


**Typical Heater Cable Layout for
24" Wide Tire Track Coverage**

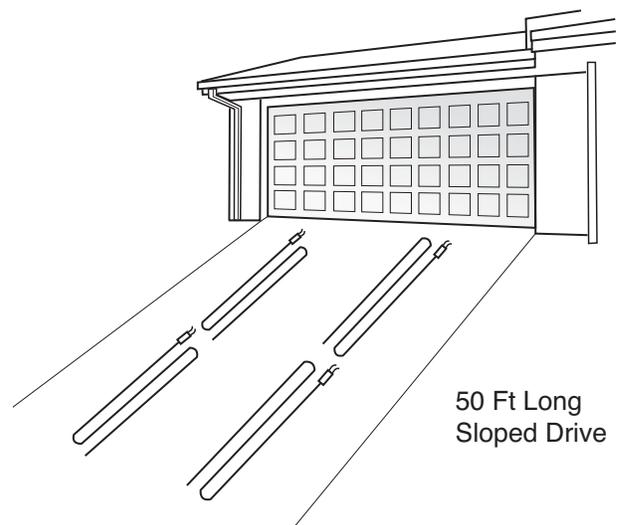

Indoor Radiant Floor Warming (any type of floor) with Tempzone (Tile) and Environ II (Carpet & Laminate Wood)

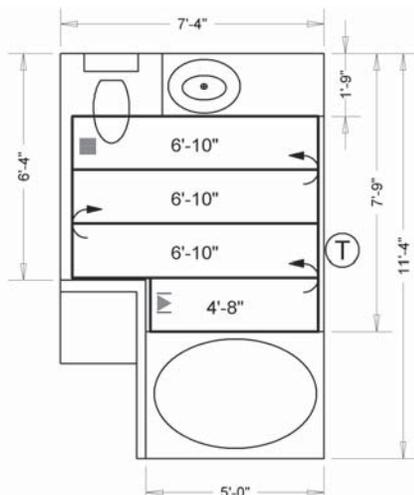

For tile & stone applications

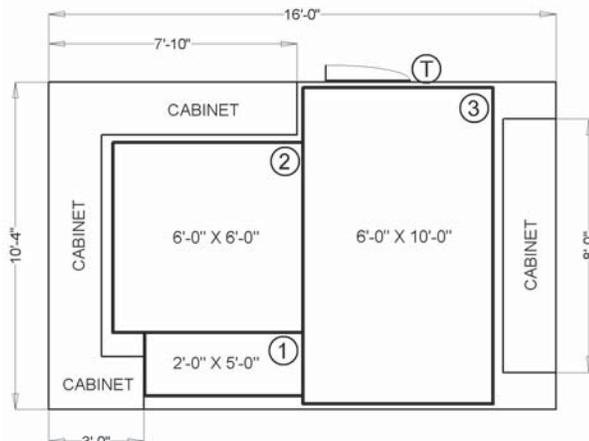


For carpet & floating floor applications

To receive your FREE installation plan & quote, fax or e-mail your plan




Residential - Commercial - Industrial

Roof, Gutter and Downspout Deicing (any roof type) with Self-Regulating Cable

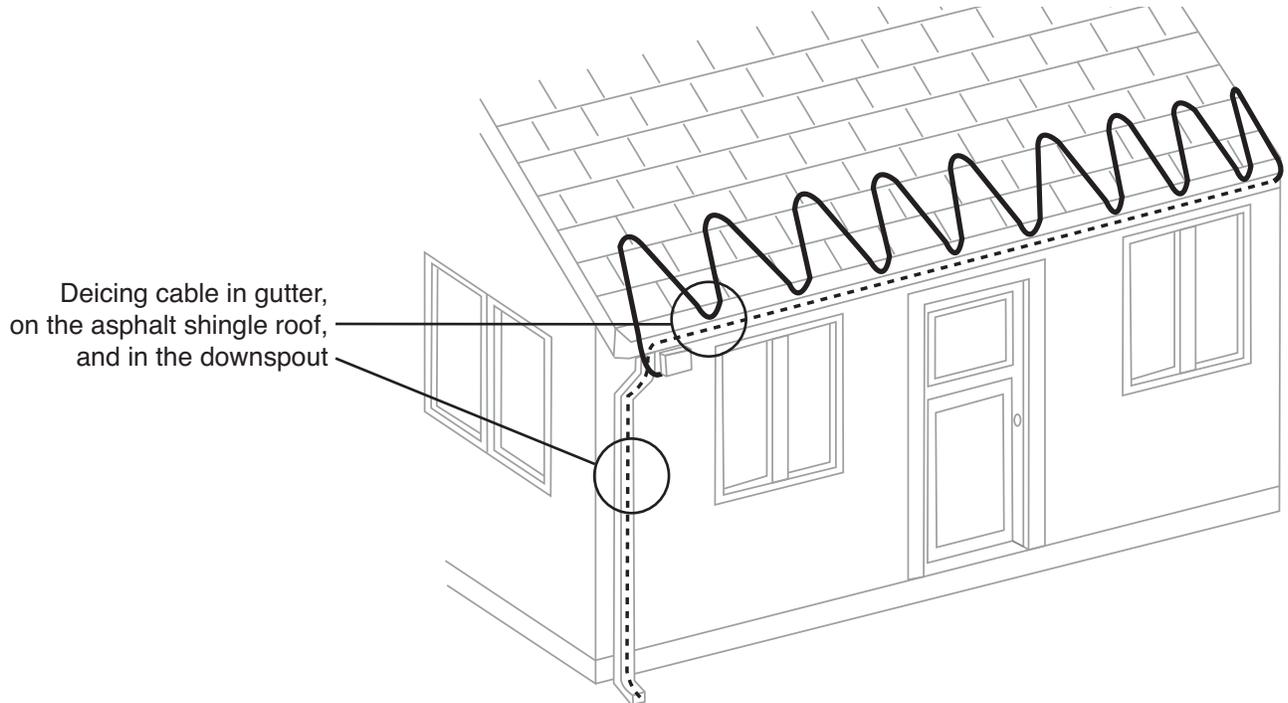

Pipe & Tank Heat Tracing for Freeze Protection or Process Heating with Self-Regulating Cable

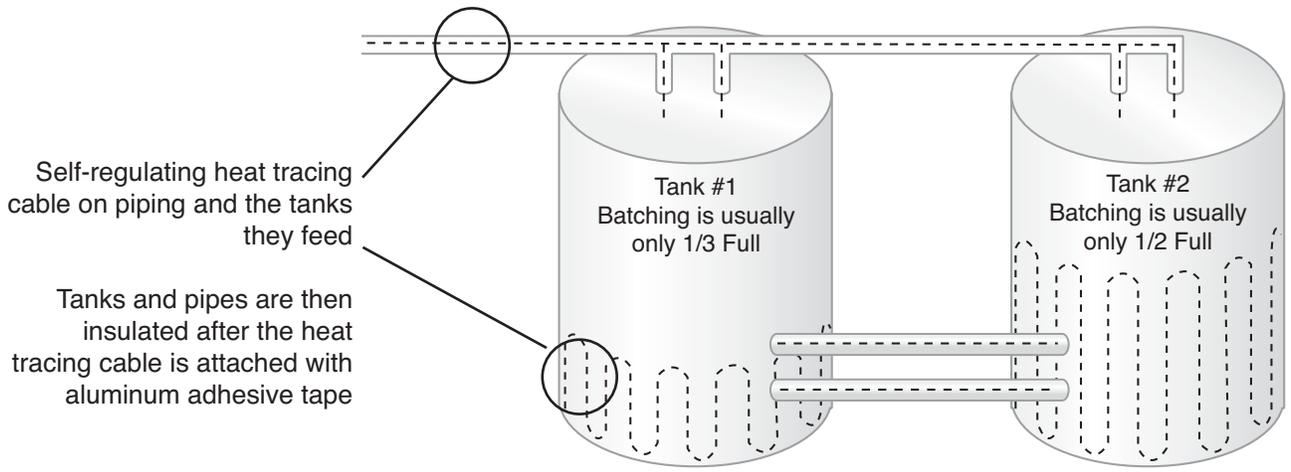

10246-B 9/2011