




WarmlyYours


Be Connected.
Be Warm. Be Radiant.

MULTIPLE ROLL WIRING DIAGRAM FOR 120V & 240V TWIN CONDUCTOR TEMPZONE WITH WITH DUAL VOLTAGE MYSA


FOR ELECTRICIAN

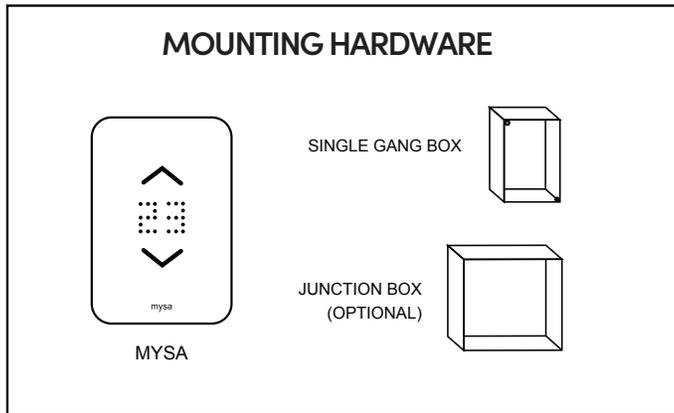



FROM POWER SOURCE 120V & 240V

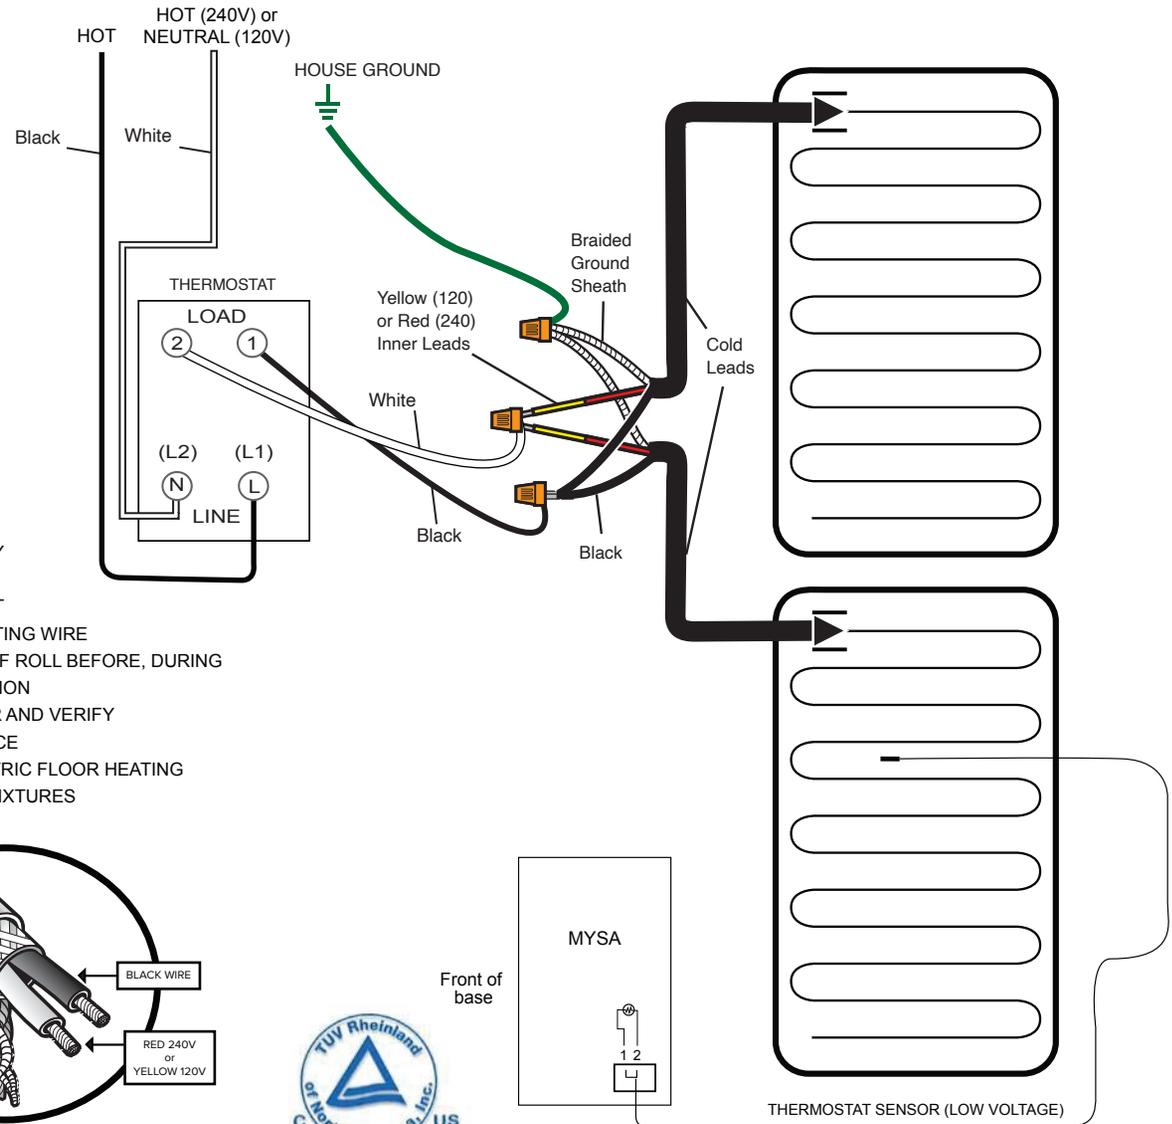

ELECTRICAL ROUGH-IN

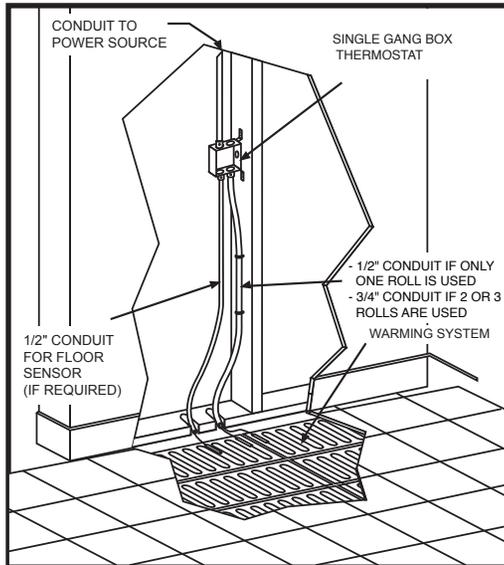

1. MAT HAS **NO** POLARITY
2. COLD LEAD IS 15 FEET
3. **DO NOT** SHORTEN MAT
4. DO NOT CUT THE HEATING WIRE
5. ALWAYS TEST OHMS OF ROLL BEFORE, DURING AND AFTER INSTALLATION
6. ALWAYS TEST SENSOR AND VERIFY 8-15 K OHM RESISTANCE
7. NEVER INSTALL ELECTRIC FLOOR HEATING UNDER PERMANENT FIXTURES

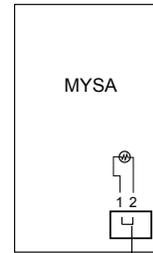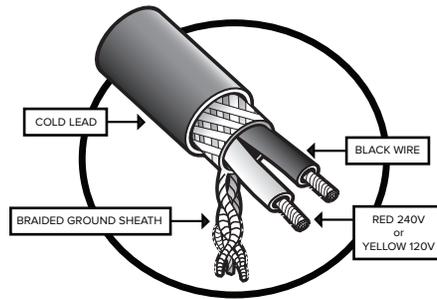

ENSURE THE SYSTEM IS GROUNDED